




CONTI® FLUX HOSE - BLUE

For the safe transport of fluxes and fuel gases

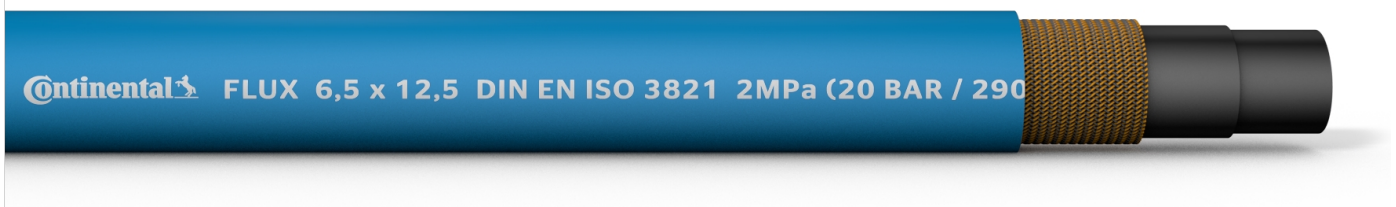

LABEL: on blue cover "Contintental FLUX 6,5 x 12,5 DIN EN ISO 3821 2MPa (20 BAR / 290 PSI) Made in Germany WJ/TC"

APPLICATIONS

Welding and brazing machines

FLOW MEDIUM

Fuel gases mixed with fluxes and oxygen, Oxygen

STANDARD / APPROVAL

DIN
EN ISO
3821:2020

DESCRIPTION

Inner lining: PA, black, impermeable, seamless

Reinforcements: Synthetic fibres

Cover: CSM-BR, blue, smooth, abrasion resistant, resistant to ozone, weather and UV

Working pressure up to: 20 bar / 290 psi

Temperature range: up to +90 °C / +194 °F

Further properties: Can also be used for welding processes with aggressive filler agents

Highly flexible

Robust

TECHNICAL DATA

nominal width	inner-Ø	wall thickness	outer-Ø	length	working pressure		min. burst pressure		min. bending radius	weight
					bar	psi	bar	psi		
1/8	3.2	1.9	7	> 10	20	290	60	870	50	36
1/4	6.5	3	12.5	> 10	20	290	60	870	80	115

Pressure based on room temperature / High pressure and/or temperature lead to reduced component durability