

Eagle Nitrile® 150 PSI


Nitrile Rubber Layflat Large Diameter Hose (LDH)

- Designed as a dependable & durable, yet lightweight and flexible solution for high volume, high pressure water transfer applications.
- The nitrile layflat allows for quick layout and retrieval and is typically used in irrigation, sewage, and general pumping duties.
- Suitable for use and recommended for INDUSTRIAL and AGRICULTURE applications in:
 - Dewatering operations
 - Irrigation
 - Sewage and general pumping applications



** This hose is constructed using an “Extruded Thru the Weave” (ETW manufacturing process).*

- Tube:** Blend of synthetic elastomers, smooth, oil resistant, black
- Reinforcement:** Single high tensile textile braid
- Cover:** Blend of synthetic elastomers compound, ribbed finish
- Temperature:** Suitable range -4°F to 176°F
- Lengths:** 100 ft. standard lengths (Longer lengths available on request)
- Colors:** black, orange, or yellow

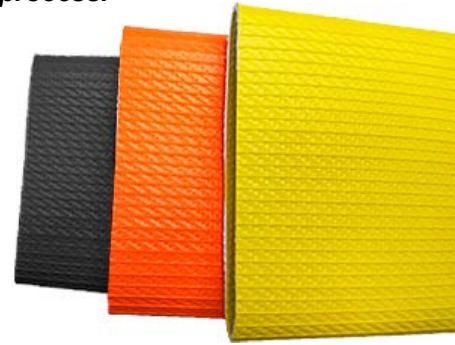

Part #	Nom. ID	Thickness	WP	Burst	Tensile Strength	Bend Radius	Weight
	in	in	psi	psi	lbs	ft	lbs/ft
008-0242-1150I	1 1/2	.08	150	450	6500	2.30	0.21
008-0322-1150I	2	.08	150	450	8250	3.60	0.30
008-0402-1150I	3	.10	150	450	11750	4.75	0.47
008-0642-1150I	4	.10	150	450	17400	5.60	0.70
008-1282-1150I	6	.12	150	450	36000	7.40	1.27
*008-0962-0200	6	.16	200	600	51600	2.00	1.68
008-1602-1150I	8	.13	150	450	51950	9.85	1.85
*008-1202-0200	8	.16	200	600	77150	2.50	2.00
008-1600-0175	10	.15	175	525	110250	10.00	2.65
008-1922-1150I	12	.16	150	450	101400	11.00	3.42

* Heavy-Duty.



Liverpool Location ISO 9001:2015 Certified QMS by Intertek

Click for directions:

New England Region
Liverpool, NY 13088
(315) 451-2770

Great Lakes Region
Cheektowaga, NY 14225
(716) 684-8224

Mid-Atlantic Region
Charlotte, NC 28273
(704) 588-9920

Midwest Region
St. Louis, MO 63111
(314) 256-0833

Gulf Coast Region
Pasadena, TX 77503
(281) 930-7777

Download the JGB® Mobile App



Connect with us:



www.jgbhose.com